CDC Engine

580SE

Service Manual

8-42441

CASE CONSTRUCTION

MidWestTech | Case 580SE, 580 Super E Loader Backoe CDC Engine Service Manual | Publication 8-42441

Order the manual at mid-west-tech.com >

ENGINE SPECIFICATION DETAILS

Cylinder Block

	Metric Value
Type	Non-Sleeved
Material	Cast Iron
ID of Cylinder	102.00 to 102.04 mm
Maximum Service Limit	102.116 mm
Cylinder Out of Round (Maximum)	0.038 mm
Cylinder Taper (Maximum)	0.076 mm
0.5 mm Oversize Piston	
Machine Cylinder Bore to	102.50 to 102.54 mm
1.00 mm Oversize Piston	
Machine Cylinder Bore to	103.00 to 103.04 mm

Service Cylinder Sleeve

Type	Dry, Can Be Replaced
Material	Cast Iron
Machine Cylinder Block Bore to	104.500 to 104.515 mm
Installation	Press Fit
Machine Sleeve Bore to:	
Standard Size Piston	102.00 to 102.04 mm
0.5 mm Oversize Piston	102.50 to 102.54 mm
1.0 mm Oversize Piston	103.00 to 103.04 mm

Piston

Type	Cam Ground
Material	Aluminum alloy
OD at 12 mm From the Bottom, 90 Degrees Piston Pin	
Standard Size Piston	101.873 to 101.887 mm
Minimum Service Limit	101.823 mm
0.5 mm Oversize Piston	102.373 to 102.387 mm
Minimum Service Limit	101.323 mm
1.0 mm Oversize Piston	102.873 to 102.887 mm
Minimum Service Limit	102.823 mm
ID of Piston Pin Bore	40.006 to 40.012 mm
Maximum Service Limit	40.025 mm
Width of 1st Ring Groove (Top)	2.465 to 2.485 mm
Width of 2nd Ring Groove (Intermediate)	2.425 to 2.445 mm
Width of 3rd Ring Groove (Oil Ring)	4.040 to 4.060 mm
Protrusion Above Cylinder Block (Maximum)	0.660 mm

Piston Pin

Type	Full Float
OD of Pin	39.997 to 40.003 mm
Minimum Service Limit	39.990 mm

MidWestTech | Case 580SE, 580 Super E Loader Backoe CDC Engine Service Manual | P... Order the manual at mid-west-tech.com >

Piston Rings

No. 1 Compression 4T-390 Engine	Key Stone Type (Barrel Face)
End Gap in 102.02 ID	0.4 to 0.70 mm
No. 1 Compression 4-390 Engine	Rectangular Type (Barrel Face)
End Gap in 102.02 ID	0.25 to 0.55 mm
Maximum Service Limit	0.806 mm
Side Clearance	0.075 to 0.120 mm
Maximum Service Limit	0.15 mm
No. 2 Compression	Rectangular Type (Tapper Face)
End Gap in 102.02 ID	0.25 to 0.55 mm
Maximum Service Limit	0.806 mm
Side Clearance	0.075 to 0.120 mm
Maximum Service Limit	0.15 mm
No. 3 Oil Control Rings	Two Piece
End Gap in 102.02 ID	0.25 to 0.55 mm
Maximum Service Limit	0.806 mm
Side Clearance	0.130 mm

Cylinder Head

Warpage (Maximum)	0.20 mm

Lifters

Material	Hardened Iron
OD of Lifter	15.961 to 15.977 mm
Minimum Service Limit	15.960 mm
Bore Diameter in Block	16.000 to 16.030 mm
Maximum Service Limit	16.055 mm

Connecting Rod

Bushing	Steel Backed Leaded Bronze
Bushing ID Installed (Ream to Size)	40.053 to 40.067 mm
Maximum Service Limit	40.092 mm
Bearing Liners	Replaceable
Journal ID Without Bearing Liners	72.987 to 73.013 mm
Bearing Oil Clearance	0.038 to 0.116 mm
Maximum Service Limit	0.129 mm
Side Clearance	0.100 to 0.300 mm
Maximum Service Limit	0.330 mm
Connecting Rod Bend (Maximum)	
Without Bushing	0.200 mm
With Bushing	0.150 mm
Connecting Rod Twist (Maximum)	
Without Bushing	0.500 mm
With Bushing	0.300 mm

MidWestTech | Case 580SE, 580 Super E Loader Backoe CDC Engine Service Manual | P... Order the manual at mid-west-tech.com >


Crankshaft

Type	Hardened Steel, Balanced
Main Bearing Liners	Replaceable
End Clearance, Center Main Bearing Cap	0.041 to 0.119 mm
Center Main Bearing Thrust Surface Thickness	2.50 mm
Connecting Rod Journal	
OD, Standard	68.987 to 69.013 mm
Minimum Service Limit	68.962 mm
0.25 mm OD Undersize, Grind to	68.737 to 68.763 mm
Minimum Service Limit	68.712 mm
0.50 mm OD Undersize, Grind to	68.487 to 68.513 mm
Minimum Service Limit	68.462 mm
0.75 mm OD Undersize, Grind to	68.237 to 68.263 mm
Minimum Service Limit	68.212 mm
1.00 mm OD Undersize, Grind to	67.987 to 68.013 mm
Minimum Service Limit	67.962 mm
Connecting Rod Journal Maximum Taper	0.013 mm
Journals Out of Round Maximum	0.050 mm
Undersize Main Bearing Liners For Service	0.25, 0.50, 0.75 and 1.00 mm
Main Bearing Oil Clearance	0.041 to 0.119 mm
Maximum Service Limit	0.140 mm
Main Bearing Journal	
OD, Standard	82.987 to 83.013 mm
Minimum Service Limit	82.962 mm
0.25 mm OD Undersize, Grind to	82.737 to 82.763 mm
Minimum Service Limit	82.712 mm
0.50 mm OD Undersize, Grind to	82.487 to 82.513 mm
Minimum Service Limit	82.462 mm
0.75 mm OD Undersize, Grind to	82.237 to 82.263 mm
Minimum Service Limit	82.212 mm
1.00 mm OD Undersize, Grind to	81.987 to 82.013 mm
Minimum Service Limit	81.962 mm
Main Bearing Journal Bore ID No Liners	87.982 to 88.018 mm
Maximum Service Limit	88.031 mm
Main Journal Width:	
1st, 2nd, 3rd, 5th	37.424 to 37.576 mm
4th	37.475 to 37.525 mm
Connect Rod Journals Width	38.950 to 39.050 mm

MidWestTech | Case 580SE, 580 Super E Loader Backoe CDC Engine Service Manual | P... Order the manual at mid-west-tech.com >


Cylinder Head Assembly

STEP 88

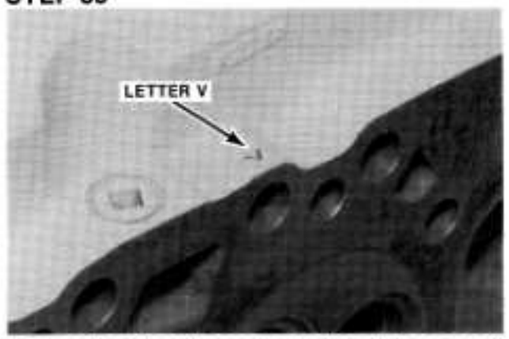

If you grind the valve seats mark the cylinder head with the letter "V".

STEP 89

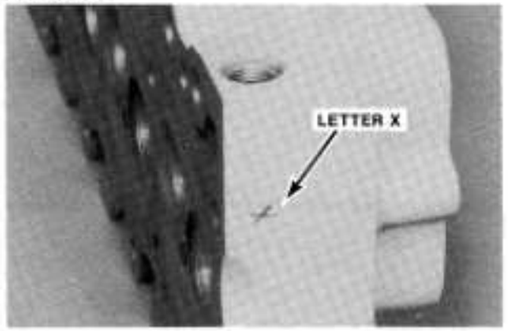

Mark the cylinder head with the letter "X" to indicate the following:


X - Oversize Bore
XX - Oversize Bore
0.25 mm machined from the cylinder head or the cylinder block surface.
XXX - Oversize Bore
0.25 mm machined from the cylinder head surface.
0.25 mm machined from the cylinder block surface.

STEP 90



Apply lubrication to the valves. Install the valves in the cylinder head.

STEP 91

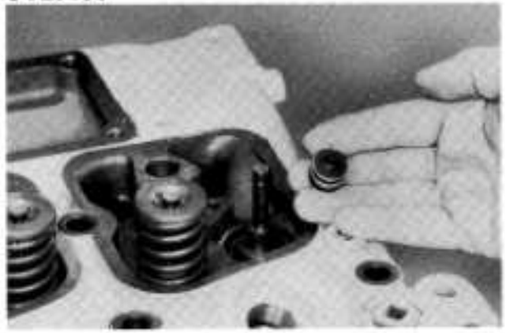

Install new valve seals.

STEP 92



Check the valve springs with a valve spring tester. The springs must have these specifications:

Free Length	55.63 mm
Outside Diameter	33.81 mm
Wire Diameter	4.88 mm
Number of Coils	7.25
Compress to 49.25 mm	64 to 72 lb (285 to 321 N)

MidWestTech | Case 580SE, 580 Super E Loader Backoe CDC Engine Service Manual | Publication 8-42441 Order the manual at mid-west-tech.com >