5600/5700
Chisel Plow

Operators Manual

9-11642

CASE IH AGRICULTURE

Order the manual at mid-west-tech.com >

Tires

Main Frame	9.5L-15 8 PR I1, Tubeless or 9.5L-15 12 PR I1, Tubeless
Primary Wings	7.60-15 6 PR I1 Tubeless or 9.5L-15 8 PR I1 Tubeless
Secondary Wings	7.60-15 6 PR I1 Tubeless
Gauge Wheels	7.60-15 6 PR I1 Tubeless
Tire Pressure 9.5L x 15 8 PR	44 PSI (303 kPa)
9.5L x 15 12 PR	64 PSI (441 kPa)
7.60 x 15 6 PR	40 PSI (267 kPa)

Tillage Width/Number of Shanks and Wheels

	Number of Shanks	Number of Wheels
Flat Fold		
17 feet (5.2 m)	17	4
19 feet (5.8 m)	19	4
21 feet (6.4 m)	21	4
23 feet (7.0 m)	23	6
25 feet (7.6 m)	25	6
27 feet (8.2 m)	27	6
Single Fold		
27 feet (8.2 m)	27	8
29 feet (8.8 m)	29	8
31 feet (9.4 m)	31	8
33 feet (10.1 m)	33	8
35 feet (10.8 m)	35	8
37 feet (11.3 m)	37	6
39 feet (11.9 m)	39	8
41 feet (12.5 m)	41	6
Double Fold		
41 feet (12.5 m)	41	6
47 feet (14.3 m)	47	14 (See Note)
49 feet (14.9 m	49	14 (See Note)
51 feet (15.5 m)	51	14 (See Note)
53 feet (16.2 m)	53	14 (See Note)


NOTE: *Two stabilizer gauge wheels are standard equipment*

MidWestTech | Case 5600, 5700 Chisel Plow Operator's Manual | Publication 9-11642 Order the manual at mid-west-tech.com >

Double Fold Machines
41 to 53 Foot (12.5 to 16.2 m)

NOTE: *The dimension shown at each shank is the distance from the center of the shank to the dotted line. The upper dimension is in inches and the lower dimension is in millimeters.*

NOTE: *If you use 12 inch (305 mm) or larger wing sweeps, make sure that you cut off the wings that are close to a tire. See Page 33 for the correct procedure.*

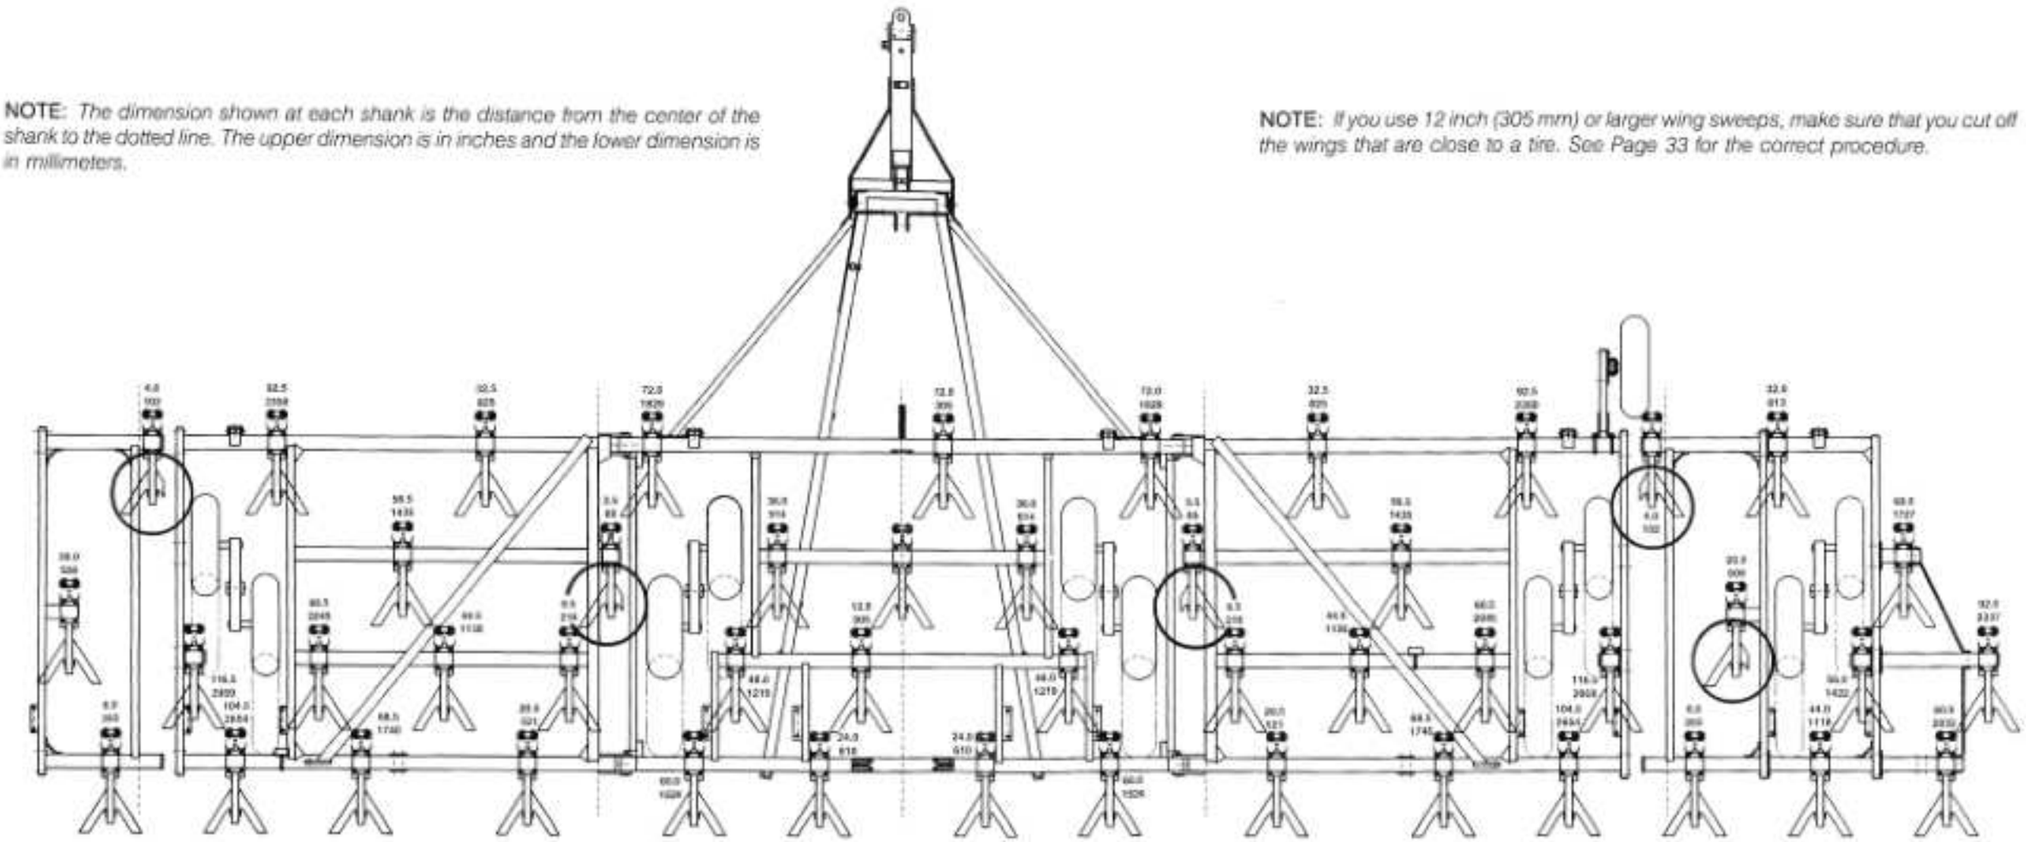

B670422

Order the manual at mid-west-tech.com >