384 Tractor Chassis

Service Manual

GSS-1489

CASE IH AGRICULTURE

MidWestTech | Case 1190 Mower Conditioner Service Manual | Publication GSS-1489

Order the manual at mid-west-tech.com >

GROUP 2

CAB

CONTENTS	Page Numbers			
	REMOVAL	DISMANTLING	ASSEMBLY	INSTALLATION
HOODSHEET	1	-	-	1
GRILLE SUPPORT	1	-	-	1
CAB ASSEMBLY	2	-	-	2
CAB FRONT SECTION	2	3	3	3
SIDE WINDOWS	4	-	-	4
REAR WINDOW	5	5	5	6
UPPER SAFETY FRAME	6	7	7	7
INSULATION AND SEAT PLATFORM	7	-	-	8
FENDERS	9	10	10	11
GLASS	11	-	-	11
CAB MOUNTINGS	12	-	-	12

MidWestTech | Case 1190 Mower Conditioner Service Manual | Publication GSS-1489 Order the manual at mid-west-tech.com >

GROUP 2
CAB

1. DESCRIPTION

The cab consists of a safety frame made from heavy gauge box sectioned steel, with toughened safety glass all round. The rear window is double hinged, whilst the side windows are hinged at the rear and have integral locks and check arms at the front.

The cab is mounted at four points on rubber bushings insulating the cab from the remainder of the tractor.

Floorplates, transmission covers and seat platforms are detachable to provide access to the various transmission and hydraulic components.

The doors are mounted on lift off hinges and have gas filled cylinders fitted to provide check arms.

Available as an attachment is a fresh air/heater unit mounted in the roof panel.

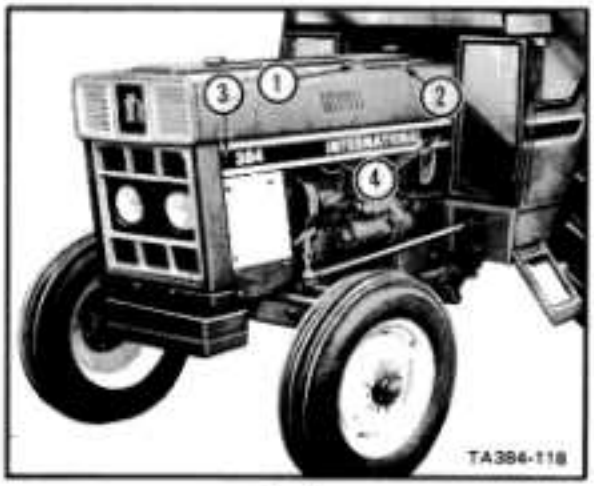


Fig. 1

2. HOODSHEET

2a. REMOVAL

(a) Remove the screws (1-1) and lift off the hood access panel (2-1).

(b) Slacken the clamp bolt and lift off the exhaust silencer.

(c) Remove the radiator grille by turning the studs (1-2) inwerd, ease out the grille then disconnect the wiring harness at the headlights.

(d) Remove the radiator cap.

(e) Remove the nuts and bolts (3-1) and bolts (4-1) then lift off the hoodsheet. Ensure that the rubber seal at the rear of the hoodsheet is not lost.

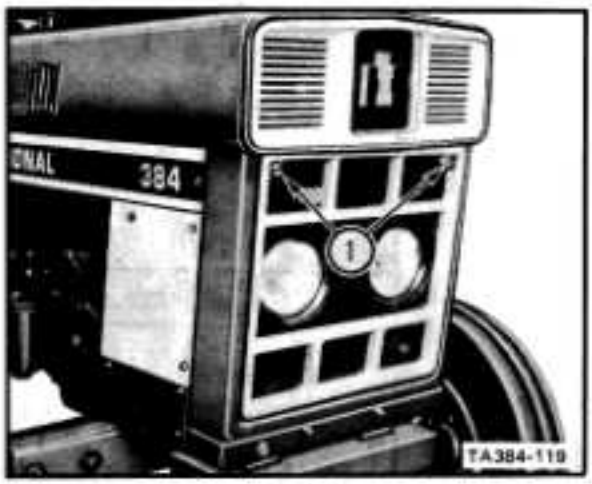


Fig. 2

2b. INSTALLATION

Reverse the removal procedure.

3. GRILLE SUPPORT

3a. REMOVAL

(a) Remove the hoodsheet, referring to para. 2.

(b) Remove the nuts and bolts (1-3) and bolts (2-3) to remove the side covers (3-3).

(c) Remove the nuts and bolts (4-3) and bolts (5-3) then lift out the grille support.

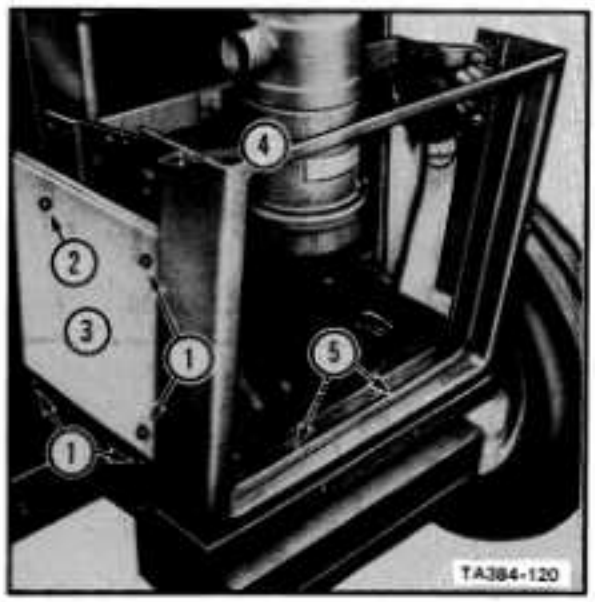


Fig. 3

3b. INSTALLATION

Reverse the removal procedure.

MidWestTech | Case 1190 Mower Conditioner Service Manual | Publication GSS-1489 Order the manual at mid-west-tech.com >